


Door Interlock Accessories



Sentry interlocks' family of door interlocks is designed to provide a safe, efficient and secure means of opening and closing doors in a controlled environment. The Door Interlock Accessories supplement the Sentry Interlocks Modules by providing visual indication and control next to each door. The LED Indicators provide visible indication of the door locks status. The stainless steel pushbutton (P/B) can serve as an Emergency Override (EO) switch or as a single door release. The red mushroom pushbutton provides an easily accessible and visible Emergency Override switch. The Wave Sensor provides touchless activation.

- Powered by Sentry Interlocks' Modules, no external power required
- Used with fail-safe electric locks powered by the Sentry Interlocks' Modules
- Termination Option 1: RJ45 modular connectors allows use of Cat 5 cables. Comes with Audible Alarm to warn of security breach or a door left ajar.
- Termination Option 2: Wire Leads, No Audible Alarm
- Stainless Steel (SS) faceplate can withstand regular cleaning including Spor-Klenz
- Can be recessed or surface mounted using standard single gang or double gang electrical boxes of the slim Door Jamb models fit into cutouts in the door frame
- Standard text included, optional text available upon request

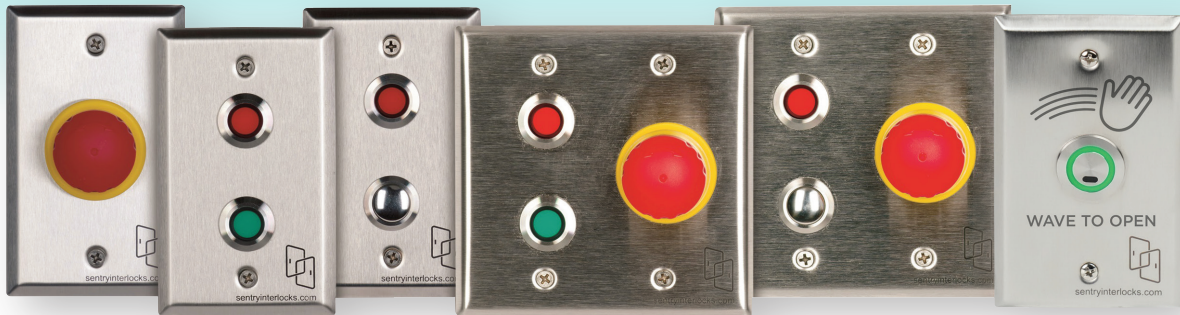

Sentry Interlocks Accessories Products




LED Indicator

- Red and Green LEDs indicate Lock Status
- Single Gang Mounting
- RJ45 or Wired Leads




LED & P/B

- Bi-Color LED Lock Status
- SS P/B Used as EO Switch or Single Door Release
- Single Gang Mounting
- RJ45 or Wired Leads



EO

- Red Mushroom EO Switch
- Single Gang Mounting
- Wired Leads

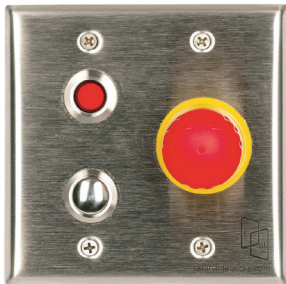

LED, P/B & EO

- Bi-Color LED Lock Status
- SS P/B Used as a Single Door Release
- Red Mushroom EO Switch
- Double Gang Mounting
- RJ45 or Wired Leads



LED EO

- Red and Green LEDs indicate Lock Status
- Red Mushroom EO Switch
- Double Gang Mounting
- RJ45 or Wired Leads



LED & P/B


- Bi-Color LED Lock Status
- SS P/B Used as EO Switch or Single Door Release
- Door Jamb Mounting
- RJ45, Audible Alarm



Wave Sensor

- Touchless Activation within 4"
- LED Ring Signifies Acceptance of Hand Wave & Door Status
- Single Gang Mounting
- RJ45 or Wired Leads

Also Check Out Our Full Line of Door Interlock Systems!



833.MOD.LOCK
sentryinterlocks.com